

Fountain Assembly Information

IMPORTANT

Do not attempt to operate pump without a proper ground.

Store your fountain indoors during freezing weather or protect, by not allowing water to collect and freeze in the bowl or shell.

For helpful hints concerning the installation and maintenance of your fountain, ask your dealer or call our Customer Service desk at 1-800-397-2231 Monday thru Friday, 8:00 A.M. to 4:30 P.M.


CAUTION

EXCESSIVE WEIGHT OR PRESSURE ON THE FOUNTAIN MAY CAUSE IT TO FALL. KEEP CHILDREN AND OTHERS FROM CLIMBING, SITTING OR LEANING ON THE FOUNTAIN AND ITS COMPONENTS.

Most fountains have no interlocking component parts. The component parts are held by gravity only.

Gluing or cementing the component parts together is not recommended. The parts may need to be dismantled to replace the pumps, hardware, or to move the fountain to another location.

"Perma Gum" is supplied with fountain fittings and may be used as a slight adhesive with the component parts. It is not hardening.

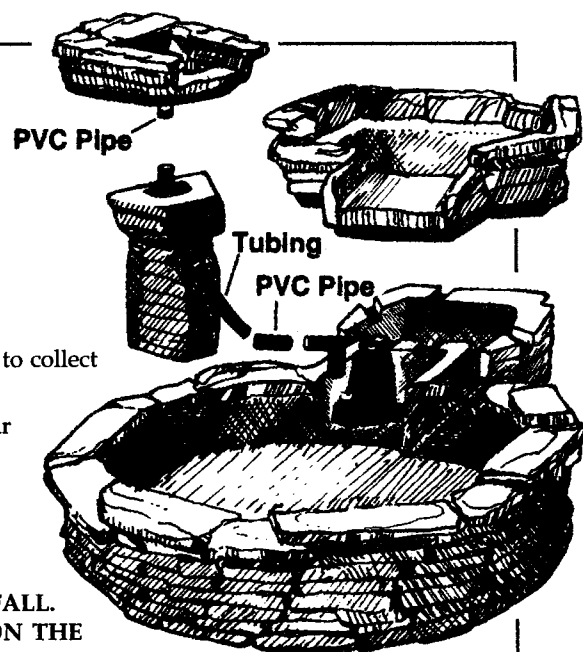

ASSEMBLY INSTRUCTIONS

TYPE D

BASIC LIP DESIGN

1. For Model #281-F. Before placing basin in desired area you will need to prepare the surface. If a hard surface, like concrete or sand, approximately an inch thick should cover the surface. This will reduce the risk of stress cracks to the basin and help with the leveling. Sand is not required on a soil surface although it does help with the leveling of the basin.

2. For All Models. Assemble fittings to pump as illustrated.

3. Once assembled place pump in center of bowl or cavity of basin. Slip one end of the vinyl tubing over the PVC pipe attached to pump. Then draping the tubing and pumps electrical cord over the curve on the edge of the bowl or basin on a firm level foundation.



For model #CA-3 and #810-F tubing is to be fed through hole on side of large cascade bowl, sealing any gap with perma gum.

4. Position remaining pedestals and bowls placing the tubing in the grooves on each pedestal. For model #281-F follow illustration. Making sure that the lips on each bowl overlap the other as much as possible.

5. Slip other end of vinyl tubing over the PVC pipe extending from the bottom of small bowl.

6. If applicable put in place the finial and pump cover.

7. Fill fountain with water and plug into a 110 volt outlet. Do not attempt to operate without a proper ground.

